



Stirodom monta plus - smp 15/50

Osovinski razmak gredica :	50cm
Debljina ploče:	15+5=20cm
Debljina rebra :	D=12cm
Težina konstrukcije :	2 kN/m ²
Rebro za ukrućenje:	50-100-150cm
Koeficijent toplotne provodljivosti (K):	0,232 w/m ²
Količina betona:	0,08m ³ /m ²
Podupiranje:	1m
Maximalni raspon:	do 5,5m (6m)
Razmak C profila:	32cm

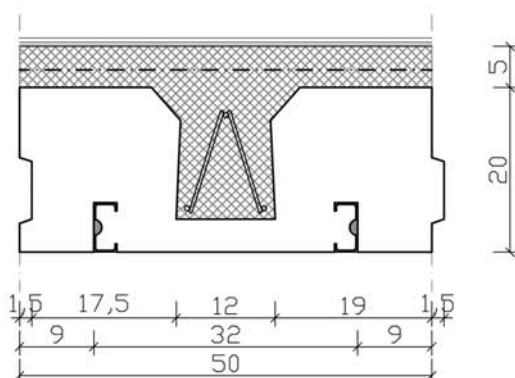

Stirodom monta plus - smp 20/50

Osovinski razmak gredica :	50cm
Debljina ploče:	20+5=25cm
Debljina rebra :	D=12cm
Težina konstrukcije :	2,30 kN/m ²
Rebro za ukrućenje:	50-100-150cm
Koeficijent toplotne provodljivosti (K):	0,176 w/m ²
Količina betona:	0,09 m ³ /m ²
Podupiranje:	1m
Maximalni raspon:	do 7m (7,5m)
Razmak C profila:	32cm

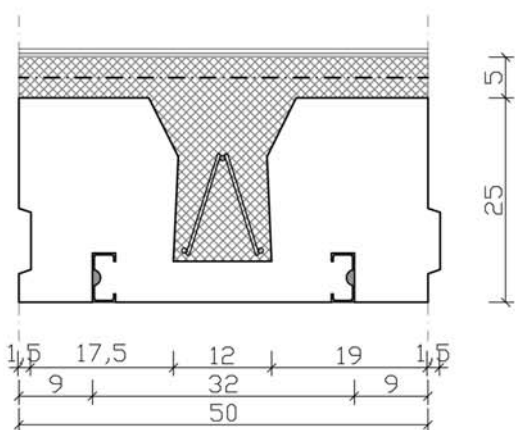

Stirodom monta plus - smp 25/50

Osovinski razmak gredica :	50cm
Debljina ploče:	25+5=30cm
Debljina rebra :	D=12cm
Težina konstrukcije :	3,30 kN/m ²
Rebro za ukrućenje:	50-100-150cm
Koeficijent toplotne provodljivosti (K):	0,143 w/m ²
Količina betona:	0,13 m ³ /m ²
Podupiranje:	1m
Maximalni raspon:	do 9m (9,5m)
Razmak C profila:	32cm